




JET100B




JET102

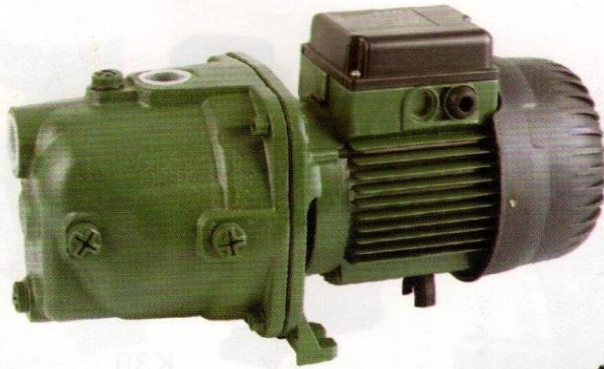

JET100M

OPERATING LIMITS:
 Fluid temperature up to +35°C
 Maximum ambient temperature +40°C

PERFORMANCE CHART AT n=2850r.p.m

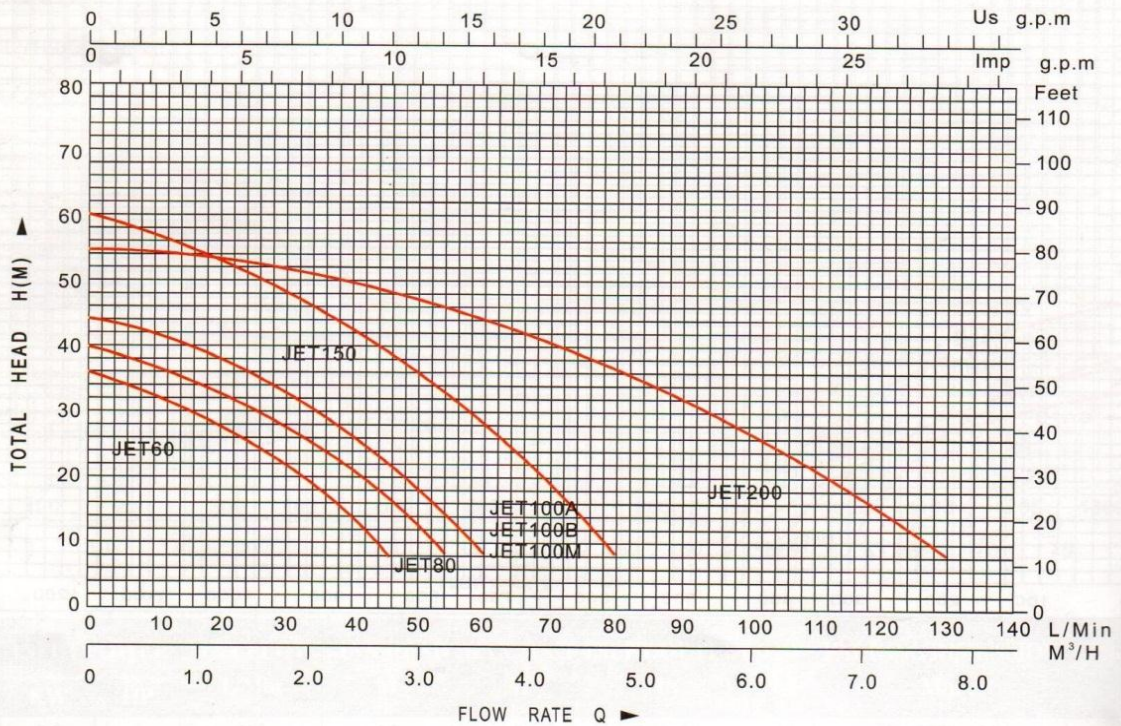

MODEL	INPUT POWER		MAX.FLOW L/Min	MAX.HEAD M	MAX.SUCT M	INLET/OUTLET IN	GW Kg	PACKING DIMENSION Mm	QUANTITY Set
	KW	HP							
JET60	0.45	0.6	45	36	9	1"×1"	12	390×210×230	1540
JET80	0.60	0.8	54	40	9	1"×1"	14	440×220×230	1540
JET100A	0.75	1.0	60	45	9	1"×1"	15	440×220×230	1250
JET100B	0.75	1.0	60	45	9	1"×1"	15	440×220×230	1250
JET100M	0.75	1.0	60	45	9	1"×1"	15	440×220×230	1250
JET150	1.1	1.5	55	60	9	1"×1"	24	520×230×280	1250
JET200	1.5	2.0	60	70	9	1"×1 1/2"	25	520×230×280	1250