



CPM170



CPM158

## CENTRIFUGAL PUMPS


OPERATING LIMITS:

Fluid temperature up to +35°C

Maximum ambient temperature +40°C

## PERFORMANCE CHART

AT n=2850r.p.m

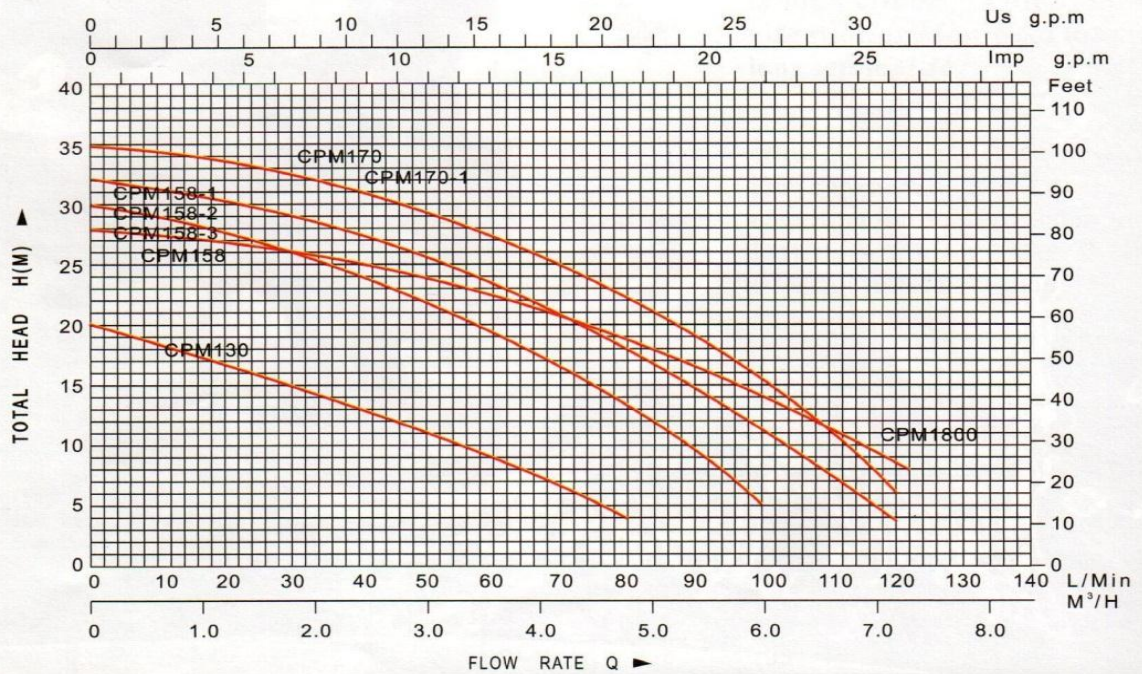

MODEL	INPUT POWER		MAX.FLOW L/Min	MAX.HEAD M	MAX.SUCT M	INLET/OUTLET IN	GW Kg	PACKING DIMENSION Mm	QUANTITY Set
	KW	HP							
CPM130	0.37	0.5	80	20	8	1"×1"		295×190×245	1800
CPM158	0.75	1.0	100	30	8	1"×1"		320×210×270	1300
CPM158-1	0.9	1.2	120	32	8	1"×1"		320×210×270	1300
CPM158-2	0.9	1.2	120	32	8	1"×1"		320×210×270	1300
CPM158-3	0.9	1.2	120	32	8	1"×1"		320×210×270	1300
CPM170	1.1	1.5	120	35	8	1"×1"		320×210×270	1500
CPM170-1	1.1	1.5	120	35	8	1"×1"		320×210×270	1500
CPM180	1.5	2.0	135	38	8	1"×1"		320×210×300	1430